

HW103 / HW203 SUPERCAPACITOR

Datasheet Rev3.0, April 2013

This Datasheet should be read in conjunction with the CAP-XX Supercapacitors Product Guide which contains information common to our product lines.

Electrical Specifications

The HW103 is a single cell supercapacitor. The HW203 is a dual cell supercapacitor with two HW103 cells in series, so HW203 capacitance = Capacitance of HW103/2 and HW203 ESR = 2 x HW103 ESR.

Table 1: Absolute Maximum Ratings

Parameter	Name	Conditions	Min	Typical	Max	Units
Terminal Voltage	Vpeak	HW103 HW203	0	2.9 5.8	2.9 5.8	V
Temperature	Tmax		-40		+85	°C

Table 2: Electrical Characteristics

Parameter	Name	Conditions	Min	Typical	Max	Units	
Terminal Voltage	Vn	HW103 HW203	0 0	2.75 5.5	2.75 5.5	V	
Capacitance	C	HW103 HW203	DC, 23°C	880	1100	1320	mF
				440	550	660	
ESR	ESR	HW103 HW203	DC, 23°C	36	45	54	mΩ
				72	90	108	
Leakage Current	I _L		2.7V, 23°C 120hrs		1	2	µA
RMS Current	I _{RMS}		23°C			5	A
Peak Current ¹	I _P		23°C			30	A

¹Non-repetitive current, single pulse to discharge fully charged supercapacitor.

Table 3: Thickness

HW103F	1.70mm	No adhesive tape on underside of the supercapacitor	HW103G	1.80mm	Adhesive tape on underside, release tape removed
HW203F	3.50mm		HW203G	3.60mm	

Definition of Terms

In its simplest form, the Equivalent Series Resistance (ESR) of a capacitor is the real part of the complex impedance. In the time domain, it can be found by applying a step discharge current to a charged cell as in Fig. 1. In this figure, the supercapacitor is pre-charged and then discharged with a current pulse, $I = 1\text{A}$ for duration 0.01 sec.

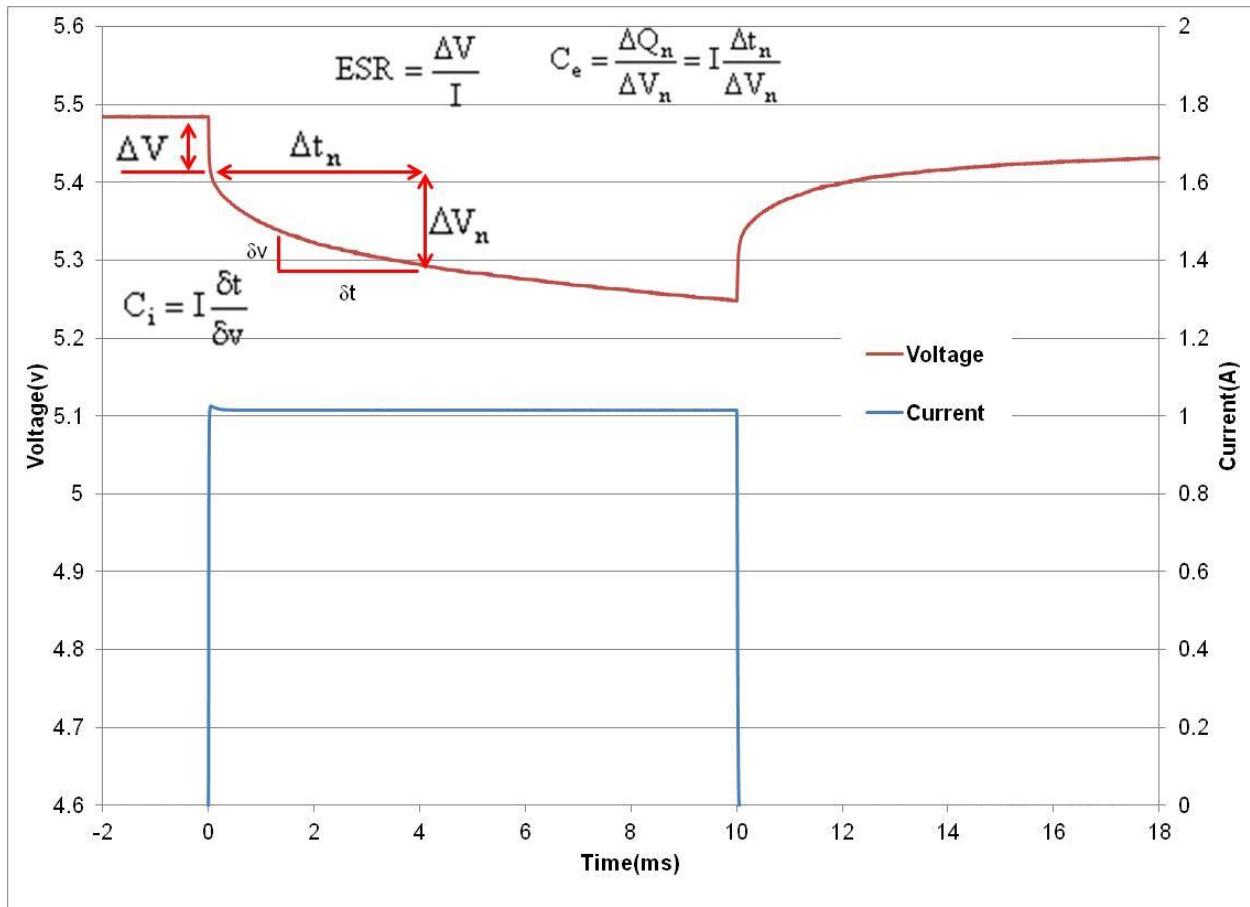


Figure 1: Effective capacitance, instantaneous capacitance and ESR for an HW203

The ESR is found by dividing the instantaneous voltage step (ΔV) by I . In this example = $(5.484\text{V} - 5.426\text{V})/1.02\text{A} = 56.9\text{m}\Omega$.

The instantaneous capacitance (C_i) can be found by taking the inverse of the derivative of the voltage, and multiplying it by I .

The effective capacitance for a pulse of duration Δt_n , $C_e(\Delta t_n)$ is found by dividing the total charge removed from the capacitor (ΔQ_n) by the voltage lost by the capacitor (ΔV_n). For constant current $C_e(\Delta t_n) = I \times \Delta t_n / \Delta V_n$. C_e increases as the pulse width increases and tends to the DC capacitance value as the pulse width becomes very long (~10 secs). After 2msecs, Fig 1 shows the voltage drop $V_{2ms} = (5.426\text{ V} - 5.323\text{V}) = 103\text{mV}$. Therefore $C_e(2ms) = 1.02\text{A} \times 2\text{ms}/103\text{mV} = 19.8\text{mF}$. After 10ms, the voltage drop = $5.426\text{ V} - 5.249\text{V} = 177\text{mV}$. Therefore $C_e(10ms) = 1.02\text{ A} \times 10\text{ms}/177\text{mV} = 57.6\text{mF}$. The DC capacitance of an HW203 = 550mF. Note that ΔV , or IR drop, is not included because very little charge is removed from the capacitor during this time. C_e shows the time response of the capacitor and it is useful for predicting circuit behavior in pulsed applications. Use the C_e for your pulsed width to calculate

Measurement of DC Capacitance

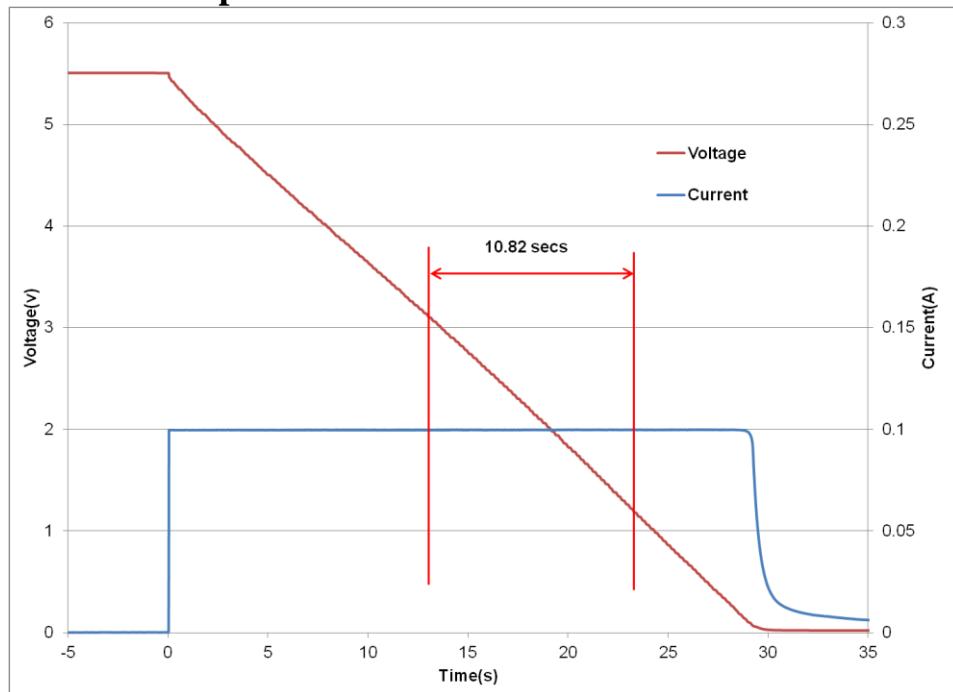


Fig 2: Measurement of DC Capacitance for an HW203

Fig 2 shows the measurement of DC capacitance by drawing a constant 100mA current from a fully charged supercapacitor and measuring the time taken to discharge from 1.5V to 0.5V for a single cell, or from 3V to 1V for a dual cell supercapacitor. In this case, $C = 0.1A \times 10.82s / 2V = 541mF$, which is well within the 550mF +/- 20% tolerance for an HW203 cell.

Measurement of ESR

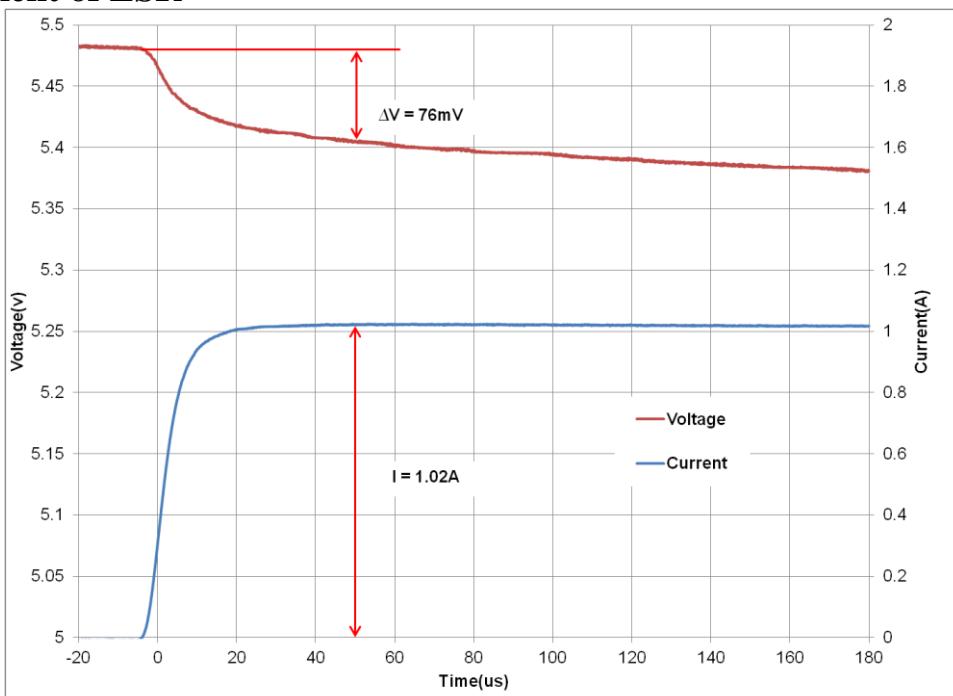


Fig 3: Measurement of ESR for an HW203

Fig 3 shows DC measurement of ESR by applying a step load current to the supercapacitor and measuring the resulting voltage drop. CAP-XX waits for a delay of 50μs after the step current is applied to ensure the voltage and current have settled. In this case the ESR is measured as $76mV / 1.02A = 74.5m\Omega$.

Effective Capacitance

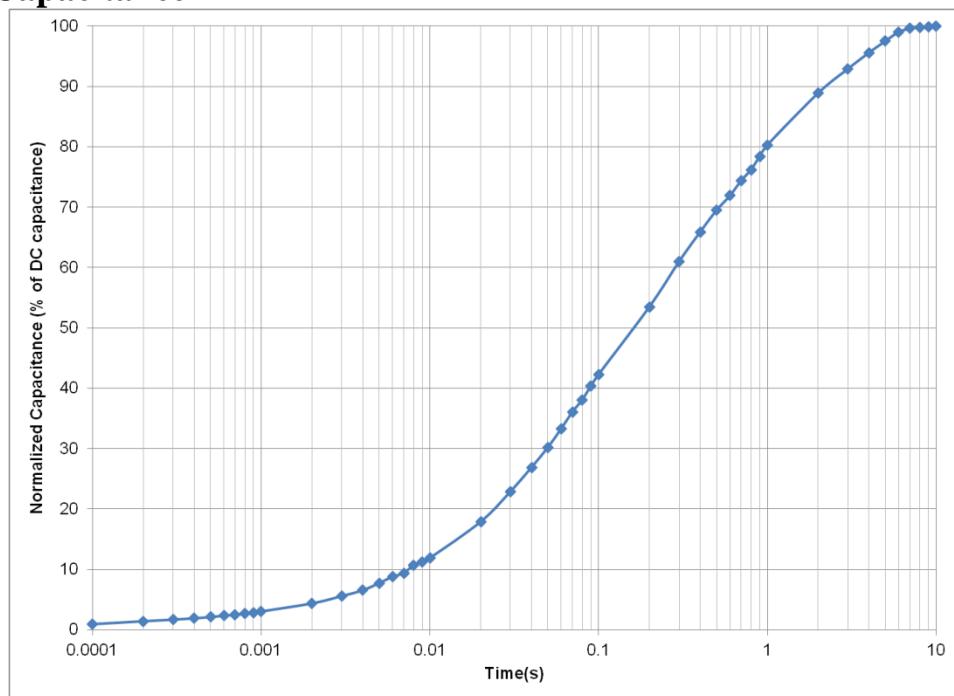


Figure 4: Effective Capacitance

Fig 4 shows the effective capacitance for the HW103, HW203 @ 23°C. This shows that for a 1msec PW, you will measure 4% of DC capacitance or 44mF for an HW103 or 22mF for an HW203. At 10msecs you will measure 12% of the DC capacitance, and at 100msecs you will measure 42% of DC capacitance.

C_{eff} is a time domain representation of the supercapacitor's frequency response. If, for example, you were calculating the voltage drop if the supercapacitor was supporting 1A for 10msecs, then you would use the $C_{eff}(10\text{msecs}) = 12\% \text{ of DC capacitance} = 66\text{mF}$ for an HW203, so $V_{drop} = 1\text{A} \times \text{ESR} + 1\text{A} \times \text{duration/C} = 1\text{A} \times 90\text{m}\Omega + 1\text{A} \times 10\text{ms} / 66\text{mF} = 241.5\text{mV}$. The next section on pulse response shows how the effective capacitance is sufficient for even short pulse widths.

Pulse Response

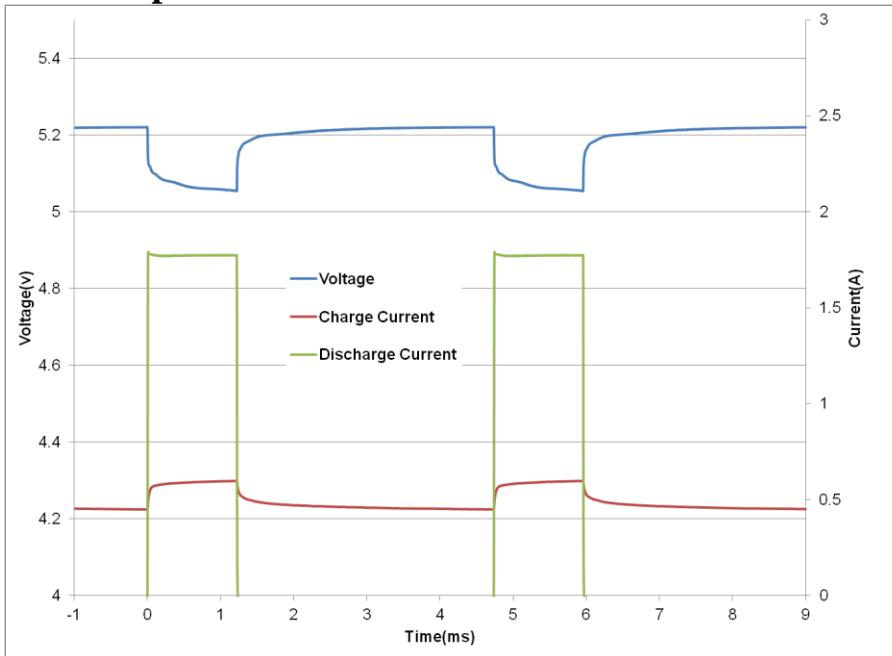


Fig 5 shows that the HW203 supercapacitor does an excellent job supporting a GPRS class 10 pulse train, drawing 1.8A for 1.1ms at 25% duty cycle. The source is current limited to 0.6A and the supercapacitor provides the 1.2A difference to achieve the peak current. At first glance the freq response of Fig 8 indicates the supercapacitor would not support a 1ms pulse, but the C_{eff} of 22mF coupled with the low ESR supports this pulse train with only ~165mV droop in the supply rail.

Fig 5: HW203 Pulse Response with GPRS Class 10 Pulse Train

DC Capacitance variation with temperature

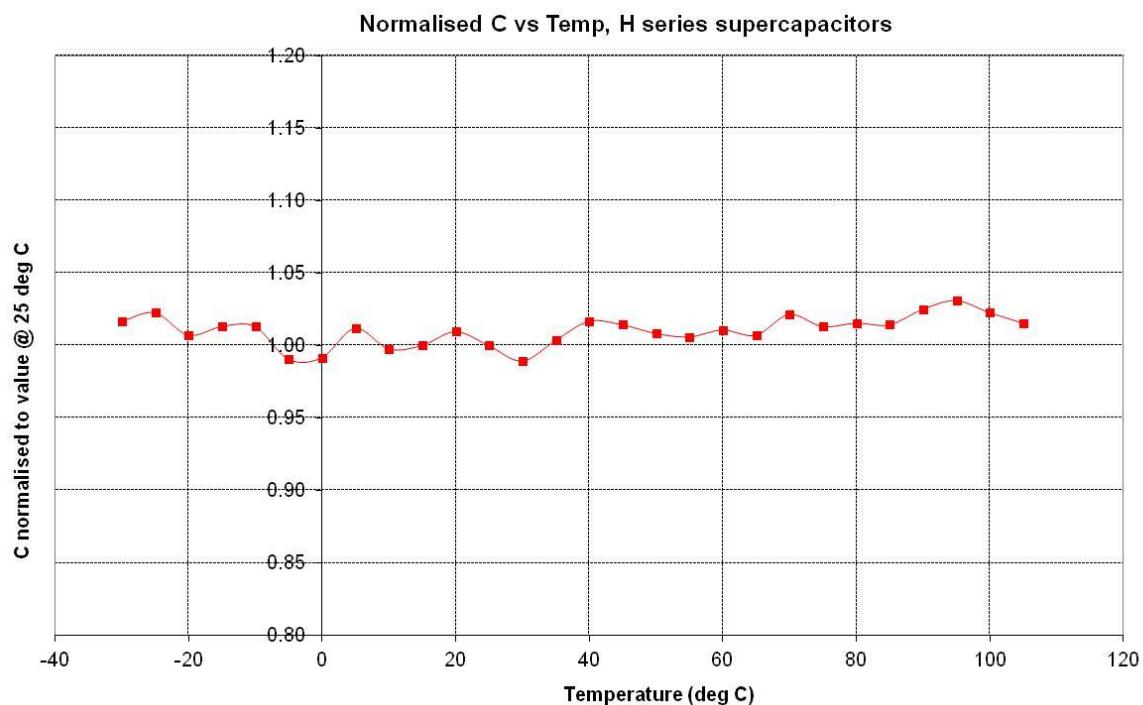


Figure 6: Capacitance change with temperature

Fig 6 shows that DC capacitance is approximately constant with temperature.

ESR variation with temperature

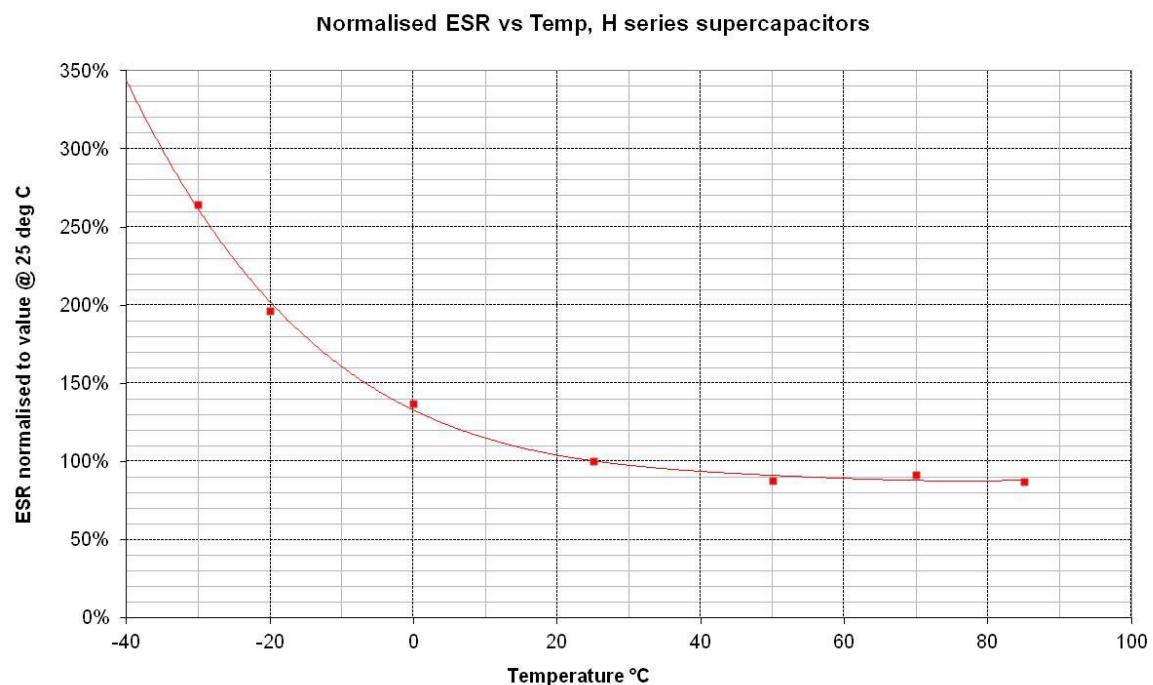


Figure 7: ESR change with temperature

Fig 7 shows that ESR at -40°C is ~3.5 x ESR at room temp, and that ESR at 70°C is ~0.9 x ESR at room temperature.

Frequency Response

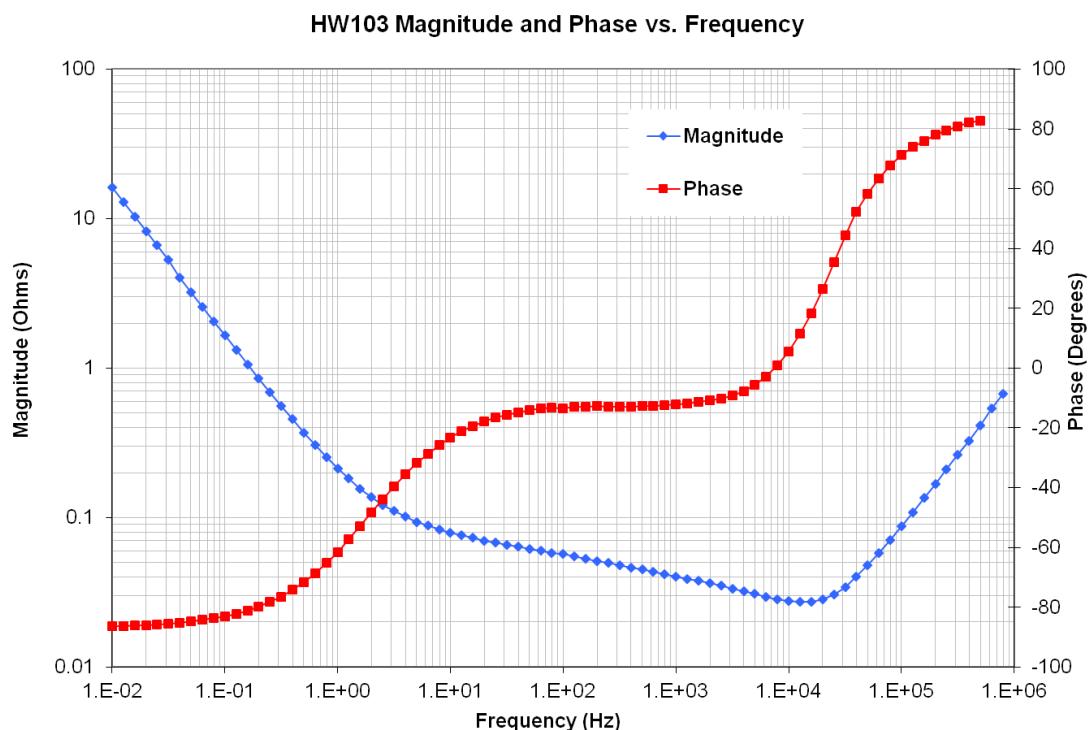


Fig 8: Frequency Response of Impedance (biased at 2.5V with a 50mV test signal)

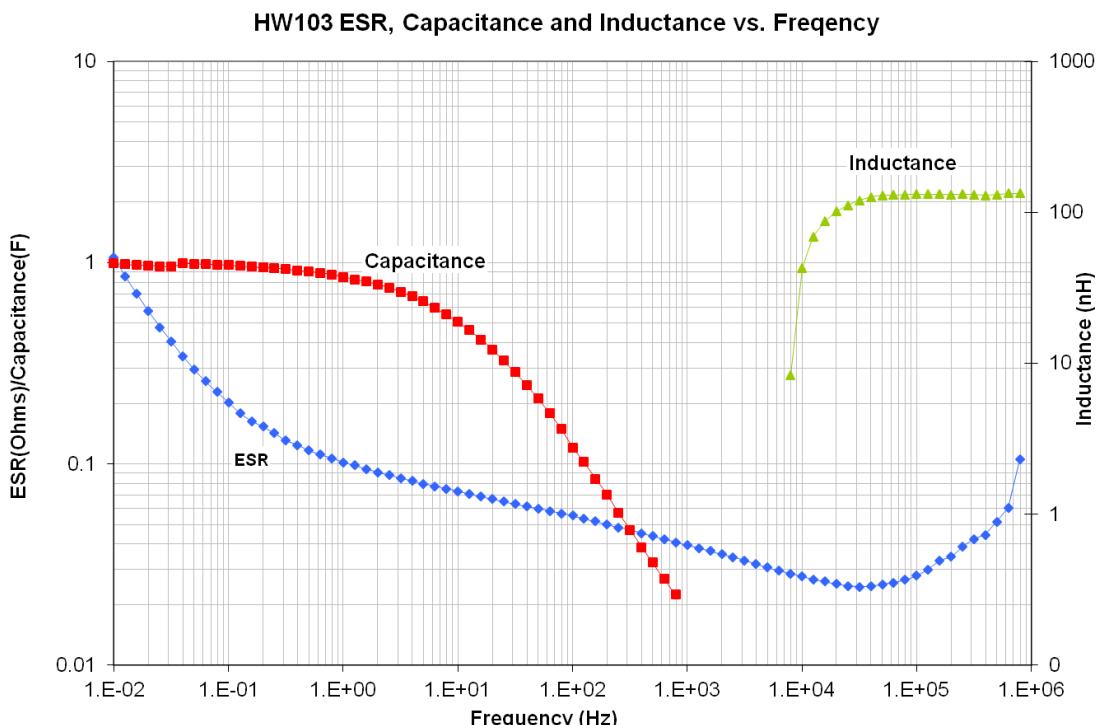


Fig 9: Frequency Response of ESR, Capacitance & Inductance

Fig 8 shows the supercapacitor behaves as an ideal capacitor until approx 2 Hz when the magnitude no longer rolls off proportionally to 1/freq and the phase crosses -45°. Performance of supercapacitors with frequency is complex and the best predictor of performance is Fig 4 showing effective capacitance as a function of pulselwidth.

Leakage Current

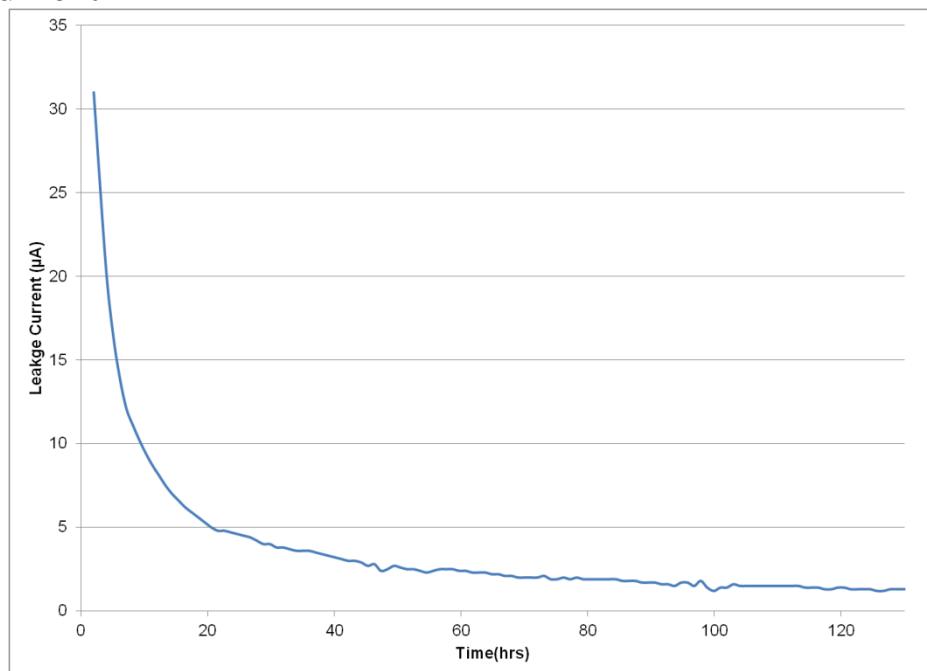


Fig 10: Leakage Current

Fig 10 shows the leakage current for HW103 at room temperature. The leakage current decays over time, and the equilibrium value leakage current will be reached after ~ 120 hrs at room temperature. The typical equilibrium leakage current is $1\mu\text{A}$ at room temperature. At 70°C leakage current will be $\sim 5\mu\text{A}$.

Charge Current

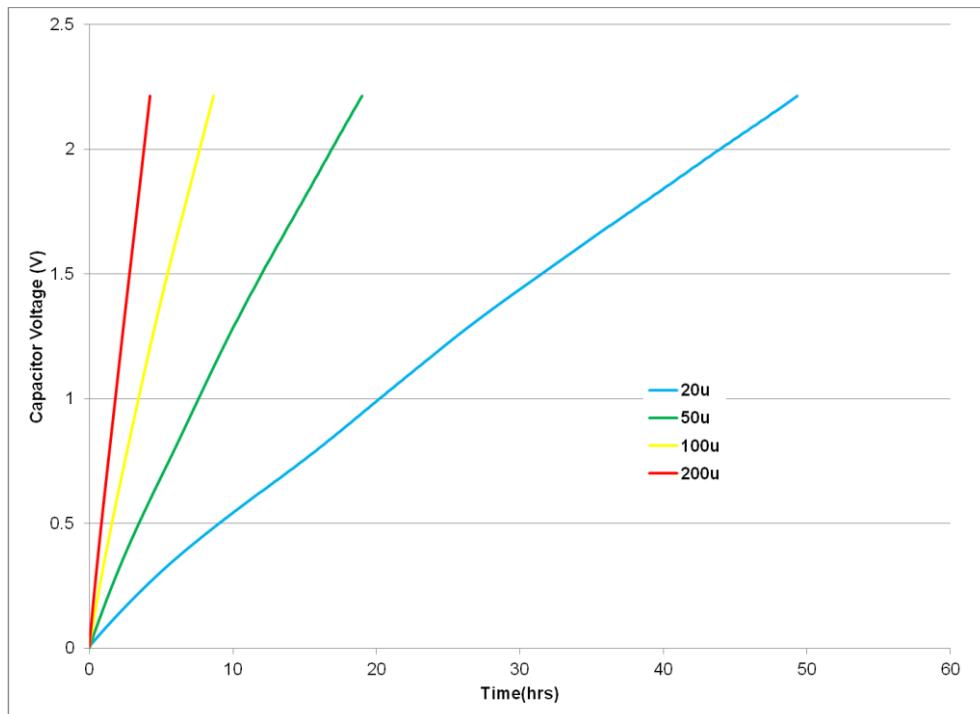


Fig 11: Charging an HW103 with low current

The corollary to the slow decay in leakage currents shown in Fig 10 is that charging a supercapacitor at very low currents takes longer than theory predicts. At higher charge currents, the charge rate is as theory predicts. For example, it should take $1.1\text{F} \times 2.3\text{V} / 0.00002\text{A} = 35.1\text{hrs}$ to charge a 1.1 F supercapacitor to 2.3V at $20\mu\text{A}$, but Fig 11 shows it took 50hrs. At $100\mu\text{A}$ charging occurs at a rate close to the theoretical rate.

RMS Current

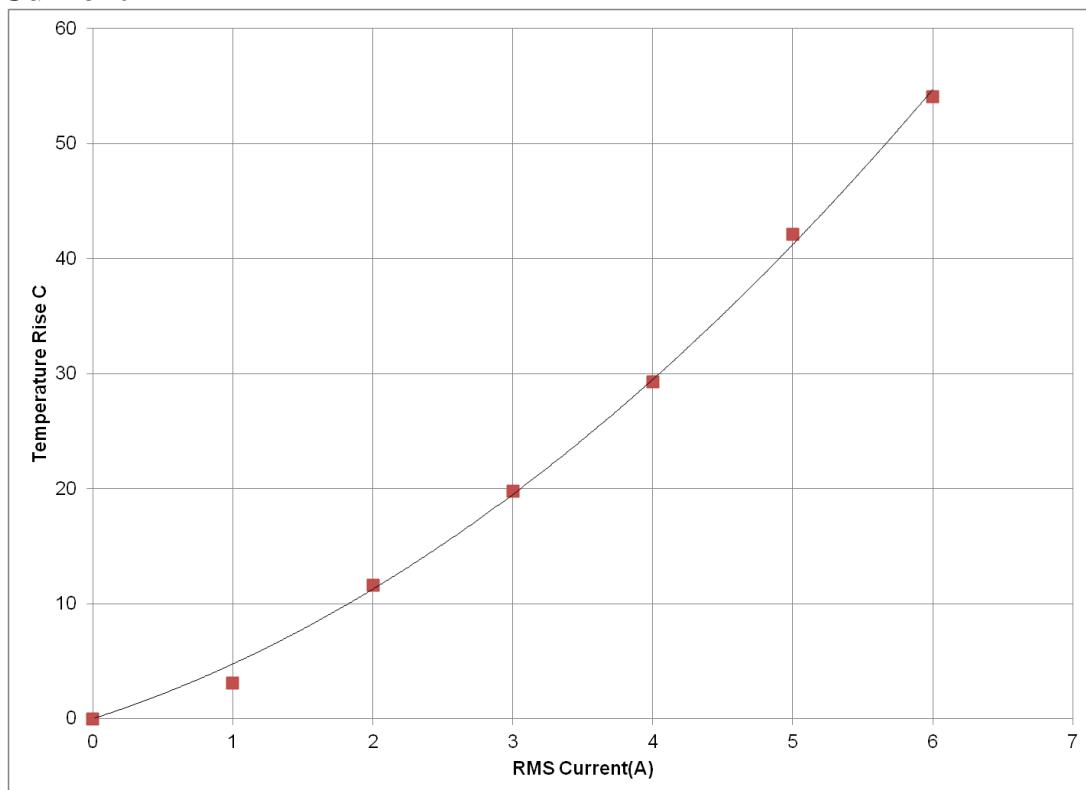


Fig 12: Temperature rise in HW203 with RMS current

Continuous current flow into/out of the supercap will cause self heating, which limits the maximum continuous current the supercapacitor can handle. This is measured by a current square wave with 50% duty cycle, charging the supercapacitor to rated voltage at a constant current, then discharging the supercapacitor to half rated voltage at the same constant current value. For a square wave with 50% duty cycle, the RMS current is the same as the current amplitude. Fig 12 shows the increase in temperature as a function of RMS current. From this, the maximum RMS current in an application can be calculated, for example, if the ambient temperature is 40°C, and the maximum desired temperature for the supercapacitor is 70°C, then the maximum RMS current should be limited to 4A, which causes a 30°C temperature increase.

CAP-XX Supercapacitors Product Guide

Refer to the package drawings in the CAP-XX Supercapacitors Product Guide for detailed information of the product's dimensions, PCB landing placements, active areas and electrical connections.

Refer to the CAP-XX Supercapacitors Product Guide for information on endurance and shelf life, transportation and storage, assembly and soldering, safety and RoHS/EREAH certification.